

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 July 2005 (14.07.2005)

PCT

(10) International Publication Number
WO 2005/063602 A1

(51) International Patent Classification⁷: **B65H 29/40**,
31/36

[DE/DE]; Reiherbruch 7, 24147 Klausdorf/Schwentine
(DE).

(21) International Application Number:
PCT/EP2004/014409

(74) Agent: **LAUERWALD, Jörg**; NexPress GmbH, Dr.-Hell-
Strasse, 24107 Kiel (DE).

(22) International Filing Date:
17 December 2004 (17.12.2004)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
103 61 051.0 22 December 2003 (22.12.2003) DE

(71) Applicant (*for all designated States except US*): **EAST-
MAN KODAK COMPANY** [—/US]; 343 State Street,
Rochester, NY 14650 (US).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **DOBRINDT, Dirk**

[Continued on next page]

(54) Title: APPARATUS FOR DEPOSITING A SHEET ON A STACK

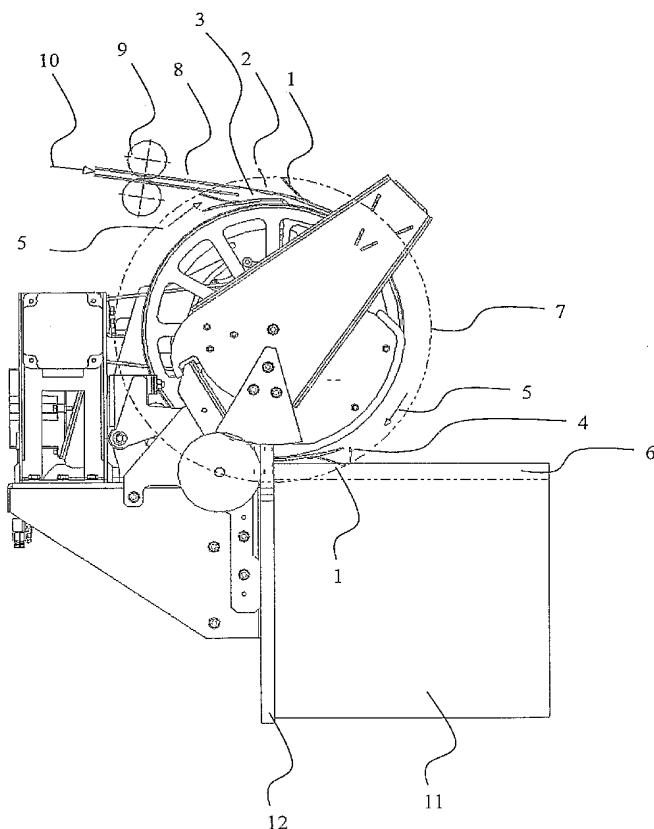

(57) Abstract: The present invention relates to an apparatus for depositing a sheet on a stack (11), preferably for a delivery unit of a printing machine, which said apparatus comprises at least one stacking device which can be driven so as to rotate about an axis of rotation in order to grasp and deposit the sheet, and comprises at least one drag element (1), which is arranged on the stacking device and carried along during rotation, whereby said drag element (1) is provided for shifting the last deposited sheet, in particular, for pulling said sheet toward a stack abutment (12). The present invention is to solve the problem of making the operation of aligning the last deposited sheet more reliable and precise. In accordance with the invention, this problem has been solved in that at least one drag element (1) is arranged, relative to the axis of rotation, on the radial exterior side of the at least one stacking member (13, 14, 17).

WO 2005/063602 A1



ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.